


# FLOOR FINISH ADJUSTMENT

Floor Finish Adjustment is a value to allow for the thickness of a floor finish. FFA alters the door height to be manufactured, in addition to Melbourne Fire Doors standard gap allowances, as below ;

- **Fire Rated** Door Height = Frame Reveal Height less 10mm gap allowance (nominal 3mm Top, 7mm Bottom)
- **Non Rated** Door Height= Frame Reveal Height less 15mm gap allowance (nominal 3mm Top, 12mm Bottom)

Below is an example of a **Fire Rated** Door requiring a Floor Finish Adjustment:

- Frames have been installed on the concrete floor surface
- Flooring is to be installed and is of 10mm thickness
- Melbourne Fire Doors are advised of an FFA = 10mm
- Adjustments are made to the door prior to manufacture

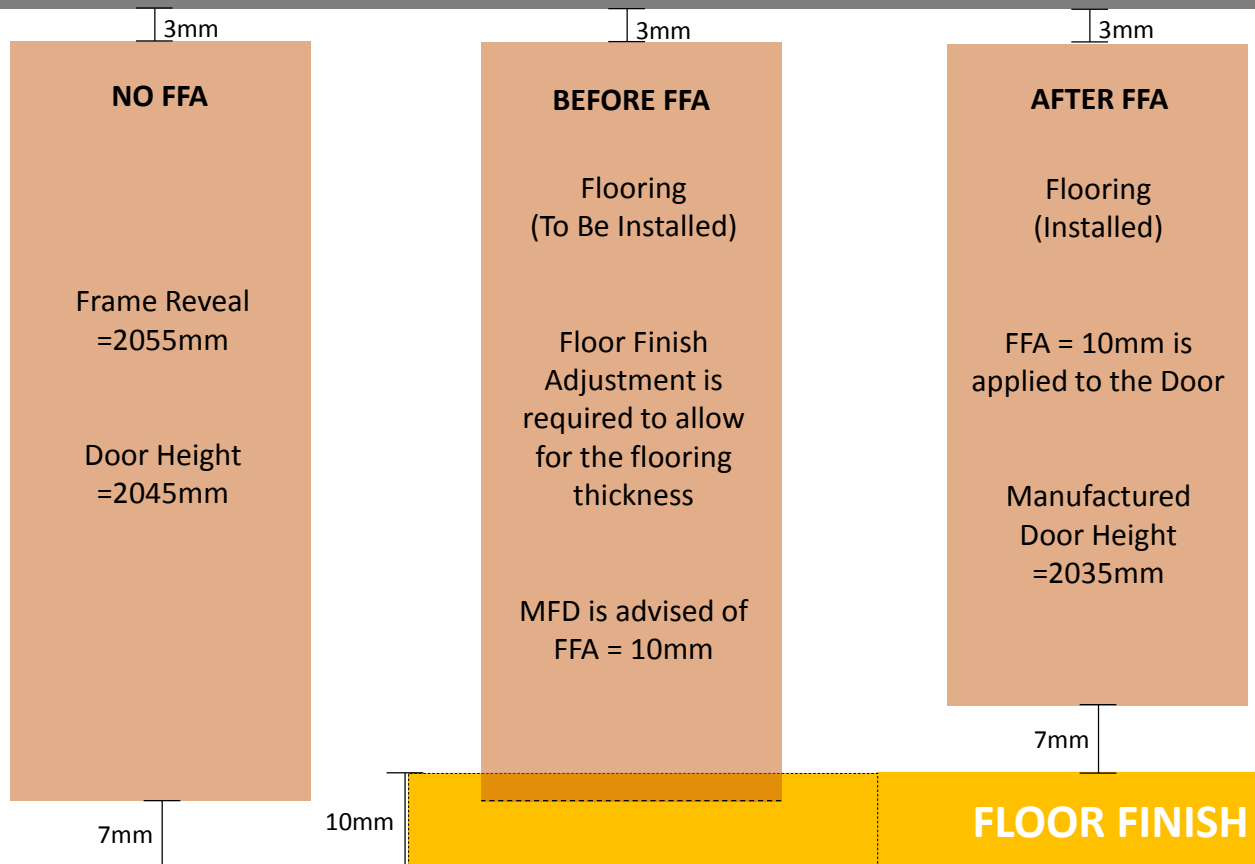

**CONCRETE FLOOR**

*Example Only*